




**STILO**  
G R A F I C A





**10"/12"/15" TFT  
AL - NUM.**


**Specifications:**

- Main Board P166 to P4
- CPU 166MHz - 3 Ghz
- LCD 10"/12"/15" TFT
- 2/4 COM-RS 232/485
- RAM 32 - 512 MB
- USB 2.0 - LAN - PS2 keyboard/mouse
- Power supply 12-24 VDC 80-260 VAC
- Operating temp.: -20°/+ 60° C
- Membrane keyboard 69 keys Al/num.

**Options:**

- Floppy Drive - CD/DVD Rom
- Touch screen Resistive
- Expansion Slot PCI-ISA
- Industrial mouse USB or Ps2
- Re-inforced cooling system
- S-Video input signal PAL
- Hard Disk: Up to 80 GB  
Disk on Module  
Flash Disk  
Compact Flash

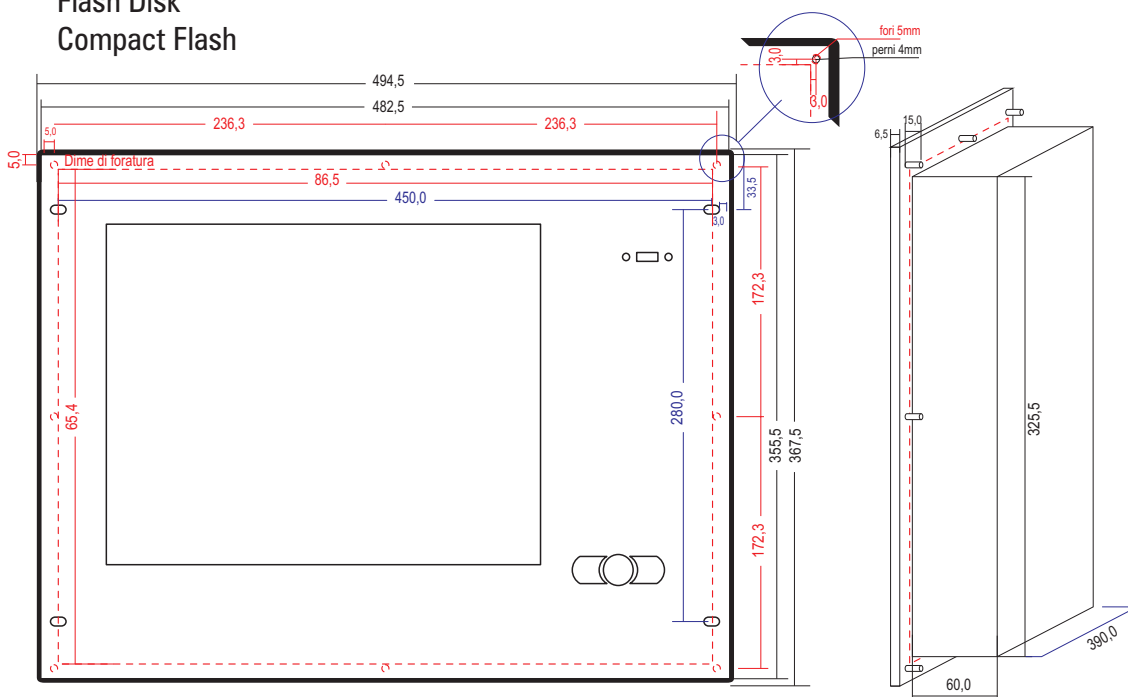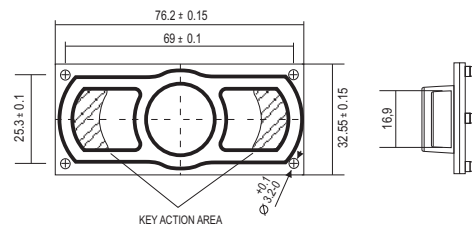








#### Specifications:

- Main Board P166 to P4
- CPU 166MHz - 3 Ghz
- LCD 8.4" TFT (res 800x600)
- Compatible: Dos-Windows / Windows CE-Linux
- 2/4 COM-RS 232/485
- RAM 32 - 256 MB
- USB 2.0 - LAN - PS2 keyboard/mouse
- Power supply 12-24 VDC 80-260 VAC
- Operating temp.: -20°/+ 60° C
- Membrane keyboard 75 keys

#### Options:

- Floppy Drive - CD/DVD Rom
- Touch Screen Resistive
- Industrial mouse USB or Ps2
- Re-inforced cooling system
- S-Video input signal PAL
- Hard Disk: Up to 80 GB  
Disk on Module  
Flash Disk  
Compact Flash
- 1 USB Port

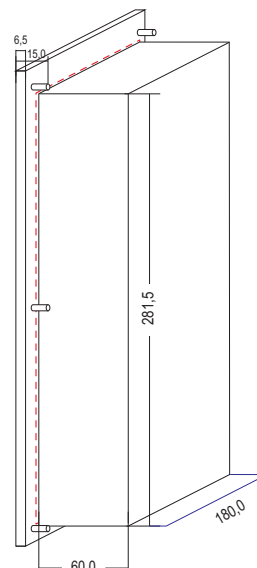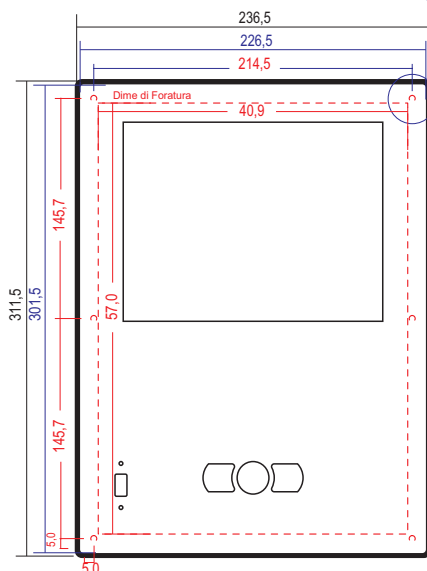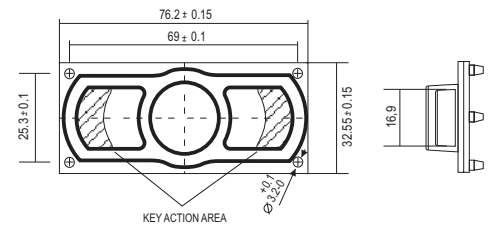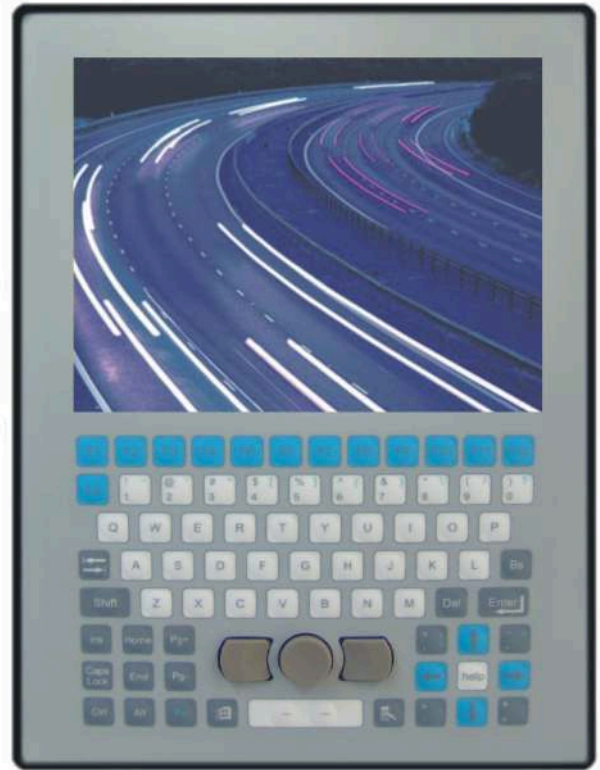




IPC Stilo

12" TFT 30k

STILO  
GRAFICA





### Specifications:

- Main Board P166 to P4
- CPU 166MHz - 3 Ghz
- LCD 12" TFT (res 800x600)
- Compatible: Dos-Windows / Windows CE-Linux
- 2/4 COM-RS 232/485
- RAM 32 - 512 MB
- USB 2.0 - LAN - PS2 keyboard/mouse
- Power supply 12-24 VDC 80-260 VAC
- Operating temp.: -20°/+ 60° C
- Membrane keyboard 30 keys Ip65

### Options:


- Floppy Drive - CD/DVD Rom
- Expansion Slot PCI-ISA
- Industrial mouse USB or Ps2
- Re-inforced cooling system
- S-Video input signal PAL
- Hard Disk: Up to 80 GB  
Disk on Module  
Flash Disk  
Compact Flash

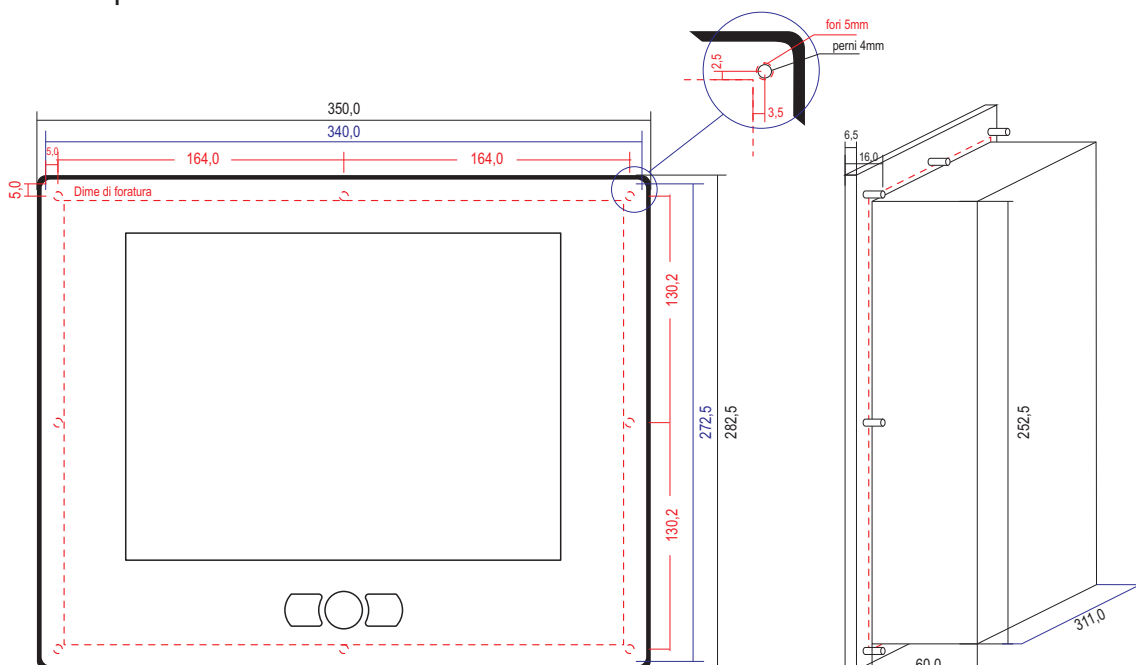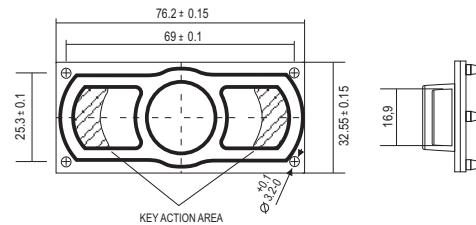

Stilo Grafica - Baggiovara (MO)

Tel. 059-9784319 - Fax 059-9784355

www.stilografica-group.com - info@stilografica-group.com





#### Specifications:


- Main Board P166 to P4
- CPU 166MHz - 3 Ghz
- LCD 8.4" TFT (res 800x600)
- Compatible: Dos-Windows / Windows CE-Linux
- 2/4 COM-RS 232/485
- RAM 32 - 256 MB
- USB 2.0 - LAN - PS2 keyboard/mouse
- Power supply 12-24 VDC 80-260 VAC
- Operating temp.: -20°/+ 60° C
- Membrane keyboard 58 keys

#### Options:

- Floppy Drive - CD/DVD Rom
- Touch Screen Resistive
- Industrial mouse USB or Ps2
- Re-inforced cooling system
- S-Video input signal PAL
- Hard Disk: Up to 80 GB  
Disk on Module  
Flash Disk  
Compact Flash

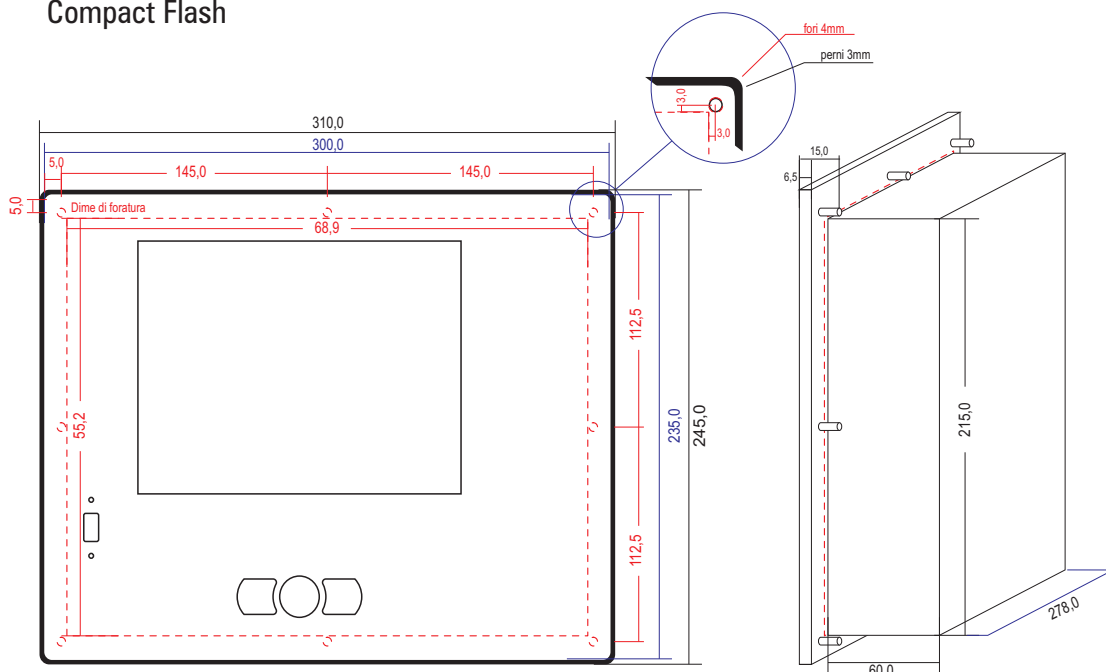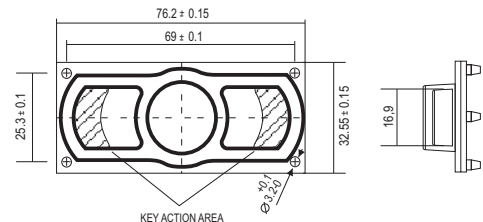





#### Specifications:

- Main Board P166 to P4
- CPU 166MHz - 3 Ghz
- LCD 6.4" TFT (res 640x480)
- Compatible: Dos-Windows / Windows CE-Linux
- 2/4 COM-RS 232/485
- RAM 32 - 256 MB
- USB 2.0 - LAN - PS2 keyboard/mouse
- Power supply 12-24 VDC 80-260 VAC
- Operating temp.: -20°/+ 60° C
- Membrane keyboard 75 keys Ip65

#### Options:

- Floppy Drive - CD/DVD Rom
- Touch Screen Resistive
- Industrial mouse USB or Ps2
- Re-inforced cooling system
- S-Video input signal PAL
- Hard Disk: Up to 80 GB
- Disk on Module
- Flash Disk
- Compact Flash

