




## Industrial PDA

# STILO GRAFICA




### Specifications:

- CPU 166MHz - 300 MHz
- LCD 3.5" TFT (res 640x480)
- Compatible: Dos-Windows / Windows CE-Linux
- 2 COM-RS 232/485
- RAM 32 - 256 MB
- HDD: 256 MB to 4 GB Flash Disk
- USB 2.0 - LAN - PS2 keyboard/mouse
- Battery: Ni Mh 6 stilo AA 2600 mA
- Power supply 12-24 AC/DC adapter
- Operating temp.: -20°/+ 60° C
- Membrane keyboard


### Options:

- Modem GSM/GPRS or Resistive
- WI-FI Lan
- GPS system



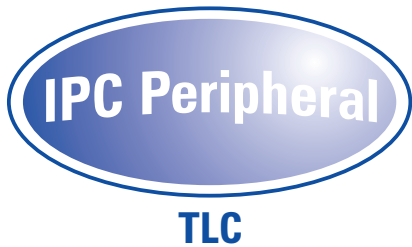


STILO  
GRAFICA

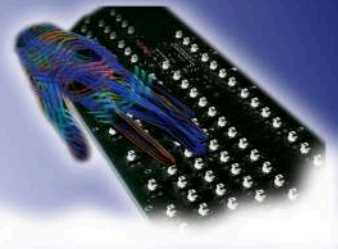

### Specifications:

- 56-Keys
- 8 Input digital
- 8 Output digital
- EEPROM
- Lcd 40x2 RI
- I/F RS 232/422/485
- Power supply 18-36 VDC-VAC optional 9-36 VDC
- Customized Protocode Lcd Ser.01
- Desktop Device
- Connection Thru cable

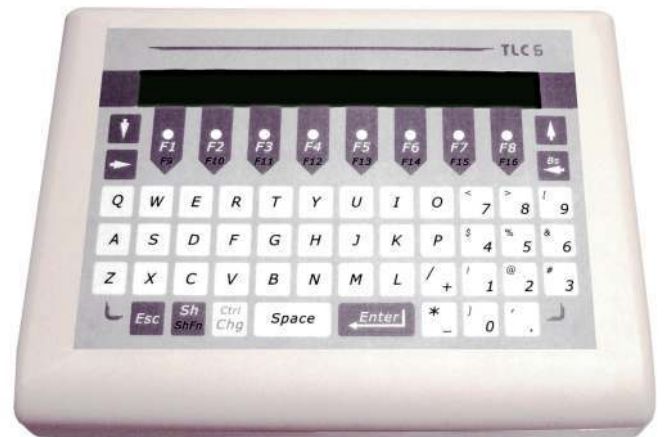

### Specifications:

- 55-Keys
- 8 Input digital
- 8 Output digital
- EEPROM
- Lcd 16x2 RI
- I/F RS 232/422/485
- Power supply 18-36 VDC-VAC optional 9-36 VDC
- Customized Protocode Lcd Ser.01
- Handheld device
- Connection Thru cable

